



APLIK
Design by Serge & Robert Cornelissen


Aluminium wall lamp available in several colours.

Typology: WALL

Ratings

- Built in line voltage **LED** module
- CCT 3000 K
- Uplight
- Surface installation over holes
- Supply voltage ~220-240V
- Switch mode: on-off dimmable trailing edge
- Die cast aluminium body, painted

Product code composition

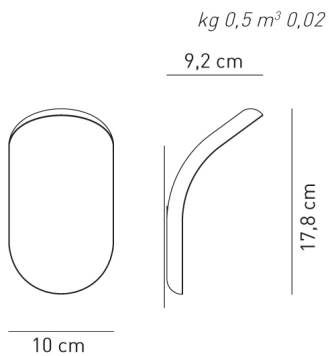

| LIK | Type | Article | Colours | Code End | Source |
|-----|---------|---------|-------------------|----------|--|
| AP | LIK XXX | | BC wrinkled white | XX | LED 16,6W - diffused beam 3000K*, 2700K, 4000K |
| | | | BR matt bronze | | |
| | | | NI matt nickel | | |

IP20 CRI90

ADA 220-240VAc **LED** ~1480 lm* 89 lm/W*

example composition code AP LIKXXX BR XX LED

Available colors



BC
Wrinkled
white

BR
Matt
bronze

NI
Matt
nickel

EELc (Energy Efficiency Label compatibility) contain built in LED lamps that cannot be changed: A, A+, A++

CUSTOMER _____ NOTES _____

APLIKXXX__XXLED

NOTICE: Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is estimated based on nominal ratings of the LED sources. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.