



WEVER & DUCRÉ  
LIGHTING

# DEEP IP44 1.0 LED

112661W5

Project

Type

Notes

Quantity

Date

## GENERAL

Ceiling

Recessed

Signal White

IP44

Interior

515<sup>a</sup> to 690<sup>b</sup> lm

9003<sup>c</sup>

## LED

3000 K

CRI 90

L80 / 50000 h

3-step binning

## OPTICAL

Flood

Beam angle 35°

## PHYSICAL

Diameter 95 mm

Height 85 mm

0.32 kg

Standard Springs

## ELECTRICAL

excl. power supply

18 V

Total connected power 7.9<sup>a</sup> to 12<sup>b</sup> W

LED Inset 5.9<sup>a</sup> to 8.7<sup>b</sup> W

350<sup>a</sup> to 500<sup>b</sup> mA

PC3

Safety distance 0.3 m

## CUTOUT

Diameter 86-89 mm

Min. ceiling thickness 4 mm

Max. ceiling thickness 25 mm

Recessed depth 90 mm


<sup>a</sup> 350mA

<sup>b</sup> 500mA


<sup>c</sup> RAL Palette colors may deviate slightly due to production conditions.



IP44



## LIGHT DISTRIBUTION

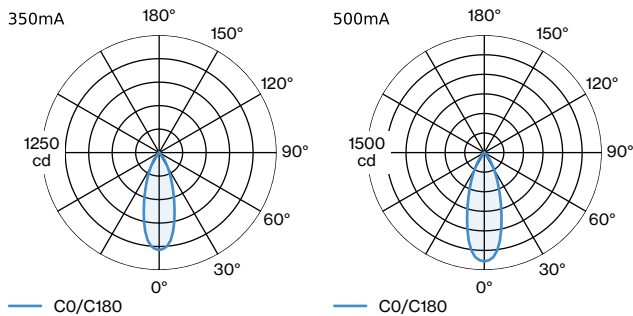



**WEVER & DUCRÉ**  
LIGHTING

# DEEP

## IP44 1.0 LED

112661W5

### CONE DIAGRAM

flood 36° 350mA			flood 36° 500mA		
h (m)	EO° (lx)	ø (m)	h (m)	EO° (lx)	ø (m)
1	1040	0.64	1	1390	0.64
2	259	1.29	2	348	1.29
3	115	1.93	3	155	1.93
4	64	2.57	4	86	2.57
5	41	3.22	5	55	3.22

### ELECTRICAL

#### Power Supply 500mA

TYPE	L · W · H (MM)	VOLTAGE	ORDERCODE
10W   11-20V	101.5-51-29.2	11 - 20V	9 0 2 1 4 4 0 5
15W   13.5-30V   phase-cut dim 5-100%	102-51-30	13.5 - 30V	9 0 2 2 4 5 0 1
10W   10-20V   1-10V dim	100-43-22.5	11 - 20V	9 0 2 3 4 4 0 1
20W   5-40V   DALI 0-100%	111-52-22	5-40V	9 0 2 4 4 6 0 2

#### Power Supply 350mA

TYPE	L · W · H (MM)	VOLTAGE	ORDERCODE
10W   14-28V   1-10V dim	101.5-51-29.5	14 - 28V	9 0 2 2 3 4 0 1
10W   12-28V   phase-cut dim	102-38-21	12 - 28V	9 0 2 2 3 4 0 2