

# LAMPYRIS - ET08044.000.0101

Lorenzo Giacomini 2014

Lighting fixture for in-ground installation in outdoor spaces, with direct light emission. Aluminium bearing base in polyacrylic paint. Pickled sheet metal layers for ground retention. Die-cast aluminium structure in polyacrylic paint. Aluminium dissipation plate. Modelled polycarbonate diffuser with opaline finish. EPDM rubber gasket. Closing frame in die-cast aluminium in metallized brown polyacrylic paint. Nylon PG9 cable gland for H05RN-F o H07RN-F input cables with Ø 4-8mm (Ø 0,2-0,3").

## DATA SHEET



Code	ET08044.000.0101
System power consumption	9W
Light source	LED
Light source lifetime	L80 (B20) 60'000h
Colour temperature	3000K Ra >80
Light distribution	diffused
Power supply	220-240V AC
Frequency	50/60Hz
Electrical configuration	ON-OFF
Driver	integrated included
Nominal luminous flux	1000lm
Lumen output	500lm
Efficiency	50.000%
Weight	4,4400Kg
Protection degree	IP65
Indice IK	IK09
Resistenza alla prova del filo incandescente	850°
Colour tollerances	SDCM 3
Dimensions	20 x 62 x 44




Colour

metallized grey






## TECHNICAL DRAWING

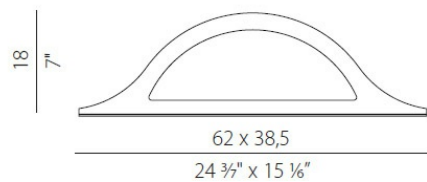

## DIAGRAMMA POLARE

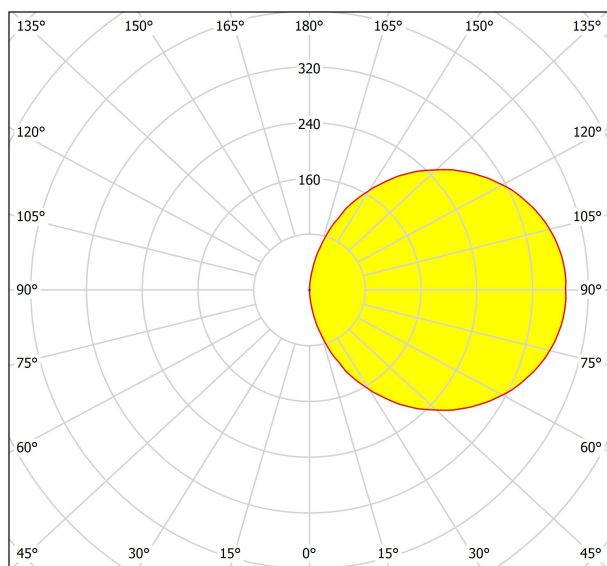

cd/klm  
— C0 - C180 — C90 - C270

$\eta = 100\%$

